



Leave Security to US

India's Most Trusted CCTV Brand



PRODUCT
CATALOGUE

e-Brouchre





Established in 2008, Hi Safe Systems stands as a beacon of innovation and proficiency within the realm of Technological Solutions. Based in Delhi, NCR, India, the company's meteoric rise to prominence is a testament to its unwavering commitment to excellence, bolstered by a loyal customer base and a team of highly trained and vastly experienced professionals.

Over the course of a relatively brief period, Hi Safe Systems has etched its name into the annals of distinction, emerging as a stalwart in the domain of CCTV Camera Companies. This feat has been achieved through an amalgamation of dedicated clientele and a cadre of experts who have honed their craft through years of rigorous training and hands-on experience.

Trade India's prestigious list, among various other platforms featuring verified sellers, proudly showcases Hi Safe Systems, underscoring its prowess in delivering supreme-quality CCTV cameras and related products. At the crux of its ethos lies an unwavering commitment to ensuring the utmost quality in the realm of CCTV systems. With an emphasis on intelligence, affordability, and customization, Hi Safe Systems stands as an exemplar of premium-quality security solutions.



Here are the compelling reasons that make Hi Safe Systems the ultimate choice:

- **Unwavering Excellence:** Established in 2008, Hi Safe Systems embodies innovation and proficiency, with meteoric rise reflecting relentless commitment to excellence.
- **Trusted Expertise:** Backed by a highly trained team, Hi Safe Systems delivers solutions rooted in deep knowledge and hands-on experience.
- **Prestigious Recognition:** Listing on Trade India and verified platforms showcases Hi Safe Systems' prowess in delivering top-quality CCTV solutions.
- **Paramount Quality:** Core to its ethos, Hi Safe Systems ensures the utmost quality in CCTV systems, setting industry benchmarks.
- **Premium Security Solutions:** Intelligence, affordability, and customization define Hi Safe Systems' offerings, surpassing industry standards.



4MP IP DOME CAMERA



HS-IPAD-04101

- 1/3" 4.0MP HD Sensor
- 2688 (H) x 1520 (V) Effective Pixels
- IR Distance of 30m
- 3.6mm Fixed Lens
- Auto Day/Night Mode
- Digital WDR
- Auto Gain Control (AGC)
- 2D DNR (Digital Noise Reduction)
- Auto White Balance (AWB)
- Wide Temperature Range of -10°C to 50°C
- IP 54

4MP IP BULLET CAMERA



HS-IPAB-04102

- 1/3", Progressive Scan, 4.0MP, CMOS
- 2592 (H) x 1520 (V) Effective Pixels
- IR Distance of 30m
- H.265/H.264/MJPEG
- 3.6mm Fixed Lens (6mm optional)
- Optical WDR of 120dB
- ONVIF Conformance
- Supports PoE & DC 12V
- Wide Voltage Range of $\pm 25\%$
- 2D/3D DNR (Digital Noise Reduction)
- 4 KV Surge Protection
- Wide Temperature Range of -30°C to 60°C
- IP 67

4MP IP DOME CAMERA (METAL)



HS-IPAD-04101M

- 1/3", 4.0MP, HD Sensor
- 2688 (H) x 1520 (V) Effective Pixels
- IR Distance of 15 m
- 3.6 mm Fixed lens
- Auto Day/Night Mode
- Digital WDR
- Auto Gain Control (AGC)
- 2D DNR (Digital Noise Reduction)
- Auto White Balance (AWB)
- Smart IR
- Wide temperature range of -10°C to 50°C
- IP 65



4MP IP BULLET CAMERA (METAL)



HS-IPAB-04102M

- 1/3", 4.0MP, HD Sensor
- 2688 (H) x 1520 (V) Effective Pixels
- IR Distance of 30 m
- 3.6 mm Fixed lens
- Auto Day/Night Mode
- Digital WDR
- Auto Gain Control (AGC)
- 2D DNR (Digital Noise Reduction)
- Auto White Balance (AWB)
- Smart IR
- Wide temperature range of -10°C to 50°C
- IP 66

4MP IP STARLIGHT DOME CAMERA



HS-IPSTD-04101

- 1/2.9" SONY CMOS Sensor
- WDR; With IR-Cut
- Full Color View in Night Vision
- Water Resistance: IP66
- Main Stream: 4MP@20-25FPS
- 4MP HD Lens With IR-Cut
- Smart Warm LED: 2pcs.
- IR Range: Upto 20M
- Internal POE
- Support Low Illumination, Warm Light Day/Night Full Color
- Inbuilt Audio

4MP IP STARLIGHT BULLET CAMERA



HS-IPSTB-04102

- 1/2.9" Sony CMOS Sensor
- WDR; With IR-Cut
- Full Color View In Night Vision
- Water Resistance: IP66
- Main Stream: 4mp@20-25fps
- 4mp Hd Lens With Ir-Cut
- Smart Warm LED: 2pcs.
- IR Range: Up To 20m
- Internal POE
- Support Low Illumination, Warm Light Day/Night Full Color
- Inbuilt Audio



4MP IP STARLIGHT DOME CAMERA (METAL)



HS-IPSTD-04101M

- 1/2.9" Sony CMOS Sensor
- WDR; With IR-Cut
- Full Color View In Night Vision
- Water Resistance: IP66
- Main Stream: 4mp@20-25fps
- 4MP HD Lens With IR-Cut
- Smart Warm LED: 2pcs.
- IR Range: Up To 20m
- Internal POE Board
- Support Low Illumination, Warm Light Day/Night Full Color
- Inbuilt Audio

4MP IP STARLIGHT BULLET CAMERA (METAL)



HS-IPSTB-04102M

- 1/2.9" Sony CMOS Sensor
- WDR; With IR-Cut
- Full Color View In Night Vision
- Water Resistance: IP66
- Main Stream: 4MP@20-25fps
- 4MP HD Lens With IR-Cut
- Smart Warm LED: 2pcs
- IR Range: Up To 20m
- Internal POE Board
- Support Low Illumination, Warm Light Day/Night Full Color
- Inbuilt Audio

5MP IP DOME CAMERA



HS-IPAD-05101

- 1/3", 5.0MP, HD Sensor
- 2688(H) X 1944 (V) Effective Pixels
- IR Distance Of 30M
- 3.6mm Fixed Lens
- Auto Day/Night Mode
- Digital WDR
- Auto Gain Control (AGC)
- 2D DNR (Digital Noise Reduction)
- Auto White Balance (AWB)
- Smart IR
- Wide Temperature Range Of -10°C To 50°C
- IP 54



5MP IP BULLET CAMERA



HS-IPAD-05102

- 1/3", 5.0MP, HD Sensor
- 2688 (H) x 1944 (V) Effective Pixels
- IR Distance of 30 m
- 3.6mm Fixed lens
- Auto Day/Night Mode
- Digital WDR
- Auto Gain Control (AGC)
- 2D DNR (Digital Noise Reduction)
- Auto White Balance (AWB)
- Smart IR
- Wide Temperature Range of -10°C to 50°C
- IP 67

5MP IP DOME CAMERA (METAL)



HS-IPAD-05101M

- 1/3", 5.0MP, HD Sensor
- 2688 (H) x 1944 (V) Effective Pixels
- IR Distance of 15m
- 3.6 mm Fixed Lens
- Auto Day/Night Mode
- Digital WDR
- Auto Gain Control (AGC)
- 2D DNR (Digital Noise Reduction)
- Auto White Balance (AWB)
- Smart IR
- Wide Temperature Range of -10°C to 50°C
- IP 66

5MP IP BULLET CAMERA (METAL)



HS-IPAB-05102M

- 1/3", 5.0MP, HD Sensor
- 2688 (H) x 1944 (V) Effective Pixels
- IR Distance of 30m
- 3.6 mm Fixed Lens
- Auto Day/Night Mode
- Digital WDR
- Auto Gain Control (AGC)
- 2D DNR (Digital Noise Reduction)
- Auto White Balance (AWB)
- Smart IR
- Wide temperature range of -10°C to 50°C
- IP 67



5MP IP STARLIGHT DOME CAMERA



HS-IPSTD-05101

- 1/2.9" Sony CMOS Sensor
- WDR; With IR-Cut
- Full Color View In Night Vision
- Water Resistance: IP66
- Main Stream: 5MP@20-25fps
- 5MP HD Lens With IR-Cut
- Smart Warm LED: 2pcs.
- IR Range: Up To 20m
- Internal POE
- Support Low Illumination, Warm Light Day/Night Full Color
- Inbuilt Audio

5MP IP STARLIGHT BULLET CAMERA



HS-IPSTB-05102

- 1/2.9" Sony CMOS Sensor
- WDR; With IR-Cut
- Full Color View In Night Vision
- Water Resistance: IP 67
- Main Stream: 5MP@20-25fps
- 5MP HD Lens With IR-Cut
- Smart Warm LED: 2pcs.
- IR Range: Up To 20m
- Internal POE
- Support Low Illumination, Warm Light Day/Night Full Color
- Inbuilt Audio

5MP IP STARLIGHT DOME CAMERA (METAL)



HS-IPSTD-05101M

- 1/2.9" Sony CMOS Sensor
- WDR; With IR-Cut
- Full Color View In Night Vision
- Water Resistance: IP 66
- Main Stream: 5MP@20-25fps
- 5MP HD Lens With IR-Cut
- Smart Warm LED: 2pcs.
- IR Range: Up To 20m
- Internal POE Board
- Support Low Illumination, Warm Light Day/Night Full Color
- Inbuilt Audio



5MP IP STARLIGHT BULLET CAMERA (METAL)



HS-IPSTB-05102M

- 1/2.9" Sony CMOS Sensor
- WDR; With IR-Cut
- Full Color View In Night Vision
- Water Resistance: IP 67
- Main Stream: 5MP@20-25fps
- 5MP HD Lens With IR-Cut
- Smart Warm LED: 2pcs.
- IR Range: Up To 20m
- Internal POE Board
- Support Low Illumination, Warm Light Day/Night Full Color
- Inbuilt Audio

4MP IP VARIFOCAL 2.8~12MM MOTORIZED BULLET CAMERA



HS-IPAB-04106VFMTZ

- 1/3", Progressive Scan, 4.0MP, CMOS
- 2592 (H) x 1944 (V) Effective Pixels
- IR Distance of 30m
- 2.8~12MM MOTORIZED Lens
- 2D/3D DNR (Digital Noise Reduction)
- Optical WDR of 120dB
- H.265/H.264/MJPEG
- ONVIF Conformance
- Supports POE & DC 12V
- Wide Temperature range of -30°C to 60°C
- Wide Voltage Range of $\pm 25\%$
- 4 KV Surge Protection
- IP 67

3MP IP SPEED DOME PTZ CAMERA 36X STL



HS-IPTZ-03101STL

- 3.0MP IP outdoor PTZ dome camera
- 3.0MP 2048 x 1536 @ 30 fps
- Autofocus, 36x zoom Lens
- 120dB WDR, 3D DNR, defog and HLC



WIFI IP STARLIGHT DOME CAMERA



HS-WID- 2041WIFIHT

- 4MP Video Along With High Quality Audio Recording
- Excellent AV Playback Built In Speaker And Microphone With Eco Cancellation Array Leds Fof Clear Night Vision Human Detection Based Recording And Push Notification View Live Or Playback Video Even When You Are Away From Home Or Workplace

4MP WIFI STARLIGHT BULLET CAMERA



HS-WIB- 2041WIFIHT

- 4MP Video Along With High Quality Audio Recording
- Excellent AV Playback Built In Speaker And Microphone With Eco Cancellation Array Leds Fof Clear Night Vision Human Detection Based Recording And Push Notification View Live Or Playback Video Even When You Are Away From Home Or Workplace

4MP 4G SUPPORT STARLIGHT DOME CAMERA



HS-4D- 20424GIHT

- 4 MP Resolution
- 4G with SD Card support
- Two way audio communication
- Built-in high sensitivity mic and speaker
- Intelligent human detection algorithm for effective alarms
- Area movement detection with real-time push information
- Mobile app and PC client software for remote monitoring (IPPRO)



4MP 4G SUPPORT BULLET CAMERA



HS-4B- 20424GIHT

- 4MP Resolution, 4G SD Card support
- Two-way audio communication
- Built-in high-sensitivity MIC and speaker
- Infrared and white dual-light design
- All time color vision with 3 adjustable night vision modes
- Intelligent human detection algorithm for effective alarms
- Area movement detection with real-time push information.
- IP66 waterproof design
- Mobile app and PC client software for remote monitoring (IPPRO)

WIFI SMART 3MP PT ROBOCAM CAMERA HD WITH 360° HUMAN TRACING



HS-HD-360WIFIPT

- Pan/tilt Baby Monitoring Camera
- Built-in high-sensitivity MIC and speaker, support two-way audio
- Intelligent motion tracking, automatically tracking when people break area
- Support Micro SD Card Up to 128GB
- Wi-Fi connection, scan the QR code to easily connect the camera
- Area motion detection, Humanoid detection, push alarm information
- Support monitoring: Pc/Mobile on Truecloud
- Compression: H.264/H.265/H.265+

WIFI SMART 3MP PT ROBOCAM CAMERA HD WITH 360° HUMAN TRACING



HS-HD-360WIFIPT-Starlight

- Pan/tilt Baby Monitoring Camera
- Built-in high-sensitivity MIC and speaker, support two-way audio
- Intelligent motion tracking, automatically tracking when people break area
- Support Micro SD Card Up to 128GB
- Wi-Fi connection, scan the QR code to easily connect the camera
- Area motion detection, Humanoid detection, push alarm information
- Support monitoring: Pc/Mobile on Truecloud
- Compression: H.264/H.265/H.265+



WIFI AND LAN SMART 3MP STARLIGHT
MINI PTZ CAMERA HD WITH 355°
HUMAN TRACING



HS-IPD-3423WIFIPTZ

- 3MP High Resolution & Colorful Night Vision
- 355° Pan 90° Tilt WiFi Camera with Two Way Audio
- Motion Detection & Two-Way Audio Function
- IP 66

WIFI AND LAN SMART 3MP STARLIGHT
MINI PTZ CAMERA HD WITH 355°
HUMAN TRACING -4G



HS-IPD-3423WIFIPTZ-4G

- 3MP High Resolution & Colorful Night Vision
- 355° Pan 90° Tilt WiFi Camera with Two Way Audio
- Motion Detection & Two-Way Audio Function
- IP 66

WIFI AND LAN SMART 3MP STARLIGHT
MINI PTZ CAMERA HD WITH 355°
HUMAN TRACING - 4G Solar



HS-IPD-3423WIFIPTZ-SOLAR

- 3MP High Resolution & Colorful Night Vision
- 355° Pan 90° Tilt WiFi Camera with Two Way Audio
- Motion Detection & Two-Way Audio Function
- IP 66



AHD 2.4 MEGAPIXEL DOME CAMERA



HS-HDD-24102 (3.6MM FIXED)

- 2.4MP HD Plastic Dome Camera
- 1/2.9" Sony Sensor
- Support-AHD
- Low Illumination, DWDR, 3DNR
- 3MP HD Lens With IR-Cut
- IR SMD Led: 12pcs.
- IR Range: Up To 20m
- Water Resistance: IP 65
- Lens 3.6mm (6mm Optional) Image Resolution – 1080p

AHD 2.4 MEGAPIXEL BULLET CAMERA



HS-HDB-24102 (3.6MM FIXED)

- 2.4MP HD Plastic Bullet Camera
- 1/2.9" Sony Sensor
- Support-AHD
- Low Illumination, DWDR, 3DNR
- 3MP HD Lens With IR-Cut
- IR SMD Led: 18pcs.
- IR Range: Up To 20m
- Water Resistance: IP 66
- Lens 3.6mm (6mm Optional) Image Resolution – 1080p

AHD 5MP DOME CAMERA



HS-HDD-54102 (3.6MM FIXED)

- 5MP HD Plastic Dome Camera
- 1/2.9" Sony Sensor
- Support-AHD
- Low Illumination, DWDR, 3DNR
- 5MP HD Lens With IR-Cut
- IR SMD Led: 12pcs.
- IR Range: Up To 20m
- Water Resistance: IP 65
- Lens 3.6mm (6mm Optional) Image Resolution:
 - 5MP (2880 × 1620)
 - 4MP (2560 × 1440);
 - 1080p (1920 × 1080);
 - 960h (960 × 576/960 × 480)



AHD 5MP BULLET CAMERA



HS-HDB-54102 (3.6MM FIXED)

- 5 MP HD Plastic Bullet Camera
- 1/2.9" Sony Sensor
- Support-AHD
- Low Illumination, DWDR, 3DNR
- 5MP HD Lens With IR-Cut
- IR SMD Led: 12pcs.
- IR Range: Up To 20m
- Water Resistance: IP 66
- Lens 3.6mm (6mm Optional) Image Resolution:
 - 5MP (2880 × 1620)
 - 4MP (2560 × 1440)
 - 1080p (1920 × 1080)
 - 960h (960 × 576/960 × 480)

AHD 2.4 MEGAPIXEL DOME CAMERA (4 IN 1 MODE)



HS-HDD-24104 (3.6MM FIXED)

- 2.4MP HD Plastic Dome Camera
- 1/2.9" Sony Sensor
- Support- AHD/TVI/CVI/960h
- Low Illumination, DWDR, 3DNR
- 3MP HD Lens With IR-Cut
- IR SMD Led: 12pcs.
- IR Range: Up To 20m
- Water Resistance: IP 65
- Lens 3.6mm (6mm Optional) Image Resolution – 1080p
- OSD Supported

AHD 2.4 MEGAPIXEL BULLET CAMERA OSD (4 IN 1 MODE)



HS-HDB-24104 (3.6MM FIXED)

- 2.4MP HD Plastic Bullet Camera
- 1/2.9" Sony Sensor
- Support-AHD/TVI/CVI/960h
- Low Illumination, DWDR, 3DNR
- 3MP HD Lens With IR-Cut
- IR SMD Led: 18pcs.
- IR Range: Up To 20m
- Water Resistance: IP 66
- Lens 3.6mm (6mm Optional) Image Resolution – 1080p
- OSD Supported



AHD 5 MEGAPIXEL DOME CAMERA (4 IN 1 MODE)



HS-HDD-54104 (3.6MM FIXED)

- 5 MP HD Plastic Bullet Camera
- 1/2.9" Sony Sensor
- Support-AHD/TVI/CVI/960H
- Low Illumination, DWDR, 3DNR
- 5MP HD Lens With IR-Cut
- IR SMD Led: 12pcs.
- IR Range: Up To 20m
- Water Resistance: IP 65
- Lens 3.6mm (6mm Optional) Image Resolution:
 - 5MP (2880 × 1620)
 - 4MP (2560 × 1440)
 - 1080p (1920 × 1080)
 - 960h (960 × 576/960 × 480)
- OSD Supported

AHD 5 MEGAPIXEL BULLET CAMERA OSD (4 IN 1 MODE)



HS-HDB-54104 (3.6MM FIXED)

- 5 MP HD Plastic Bullet Camera
- 1/2.9" Sony Sensor
- Support-AHD/TVI/CVI/960H
- Low Illumination, DWDR, 3DNR
- 5MP HD Lens With IR-Cut
- IR SMD Led: 18pcs.
- IR Range: Up To 20m
- Water Resistance: IP 65
- Lens 3.6mm (6mm Optional) Image Resolution:
 - 5MP (2880 × 1620)
 - 4MP (2560 × 1440)
 - 1080p (1920 × 1080)
 - 960h (960 × 576/960 × 480)
- OSD Supported

2.4 MP AHD STARLIGHT DOME CAMERA



HS-HDSTD-02103

- 2.4MP HD Plastic Starlight Night Colour Vision Dome Camera
- 1/2.9" Sony Sensor
- Support- AHD
- Low Illumination, DWDR, 3DNR
- 3MP HD Lens With IR-Cut
- Warmlight Led: 2pcs.
- IR Range: Up To 20m
- Water Resistance: IP 65
- Lens 3.6mm (6mm Optional)
- Image Resolution – 1080p



2.4 MP AHD STARLIGHT BULLET CAMERA



HS-HDSTB-02103

- 2.4MP HD Plastic Starlight Night Colour Vision Bullet Camera
- 1/2.9" Sony Sensor
- Support-AHD
- Low Illumination, DWDR, 3DNR
- 3MP HD Lens With IR-Cut
- Warmlight Led: 3pcs.
- IR Range: Up To 20m
- Water Resistance: IP 66
- Lens 3.6 Mm(6mm Optional)
- Image Resolution – 1080p

5 MP AHD STARLIGHT DOME CAMERA



HS-HDSTD-05104

- 5MP HD Plastic Starlight Night Colour Vision Dome Camera
- 1/2.9" Sony Sensor
- Support-AHD
- Low Illumination, DWDR, 3DNR
- 3MP HD Lens With IR-Cut
- Warmlight Led: 2pcs.
- IR Range: Up To 20m
- Water Resistance: IP 65
- Lens 3.6mm (6mm Optional) Image Resolution:
 - 5MP (2880 × 1620)
 - 4MP (2560 × 1440)
 - 1080p (1920 × 1080)
 - 960h (960 × 576/960 × 480)

5 MP AHD STARLIGHT BULLET CAMERA



HS-HDSTB-05104

- 5MP HD Plastic Starlight Night Colour Vision Dome Camera
- 1/2.9" Sony Sensor
- Support-AHD
- Low Illumination, DWDR, 3DNR
- 3MP HD Lens With IR-Cut
- Warmlight Led: 3pcs.
- IR Range: Up To 20m
- Water Resistance: IP 66
- Lens 3.6mm (6mm Optional) Image Resolution:
 - 5MP (2880 × 1620)
 - 4MP (2560 × 1440)
 - 1080p (1920 × 1080)
 - 960h (960 × 576/960 × 480)



2.4 MP AHD STARLIGHT DOME CAMERA (AUDIO)



HS-HDSTD-02103A

- 2.4MP HD Plastic Starlight Night Colour Vision Bullet Camera
- 1/2.9" Sony Sensor
- Support-TVI
- Low Illumination, DWDR, 3DNR
- 3MP HD Lens With IR-Cut
- Warmlight Led: 2pcs.
- IR Range: Up To 20m
- Water Resistance: IP 65
- Lens 3.6mm (6mm Optional) Image Resolution:
 - 1080p (1920 × 1080)
- Audio- Inbuilt

2.4 MP AHD STARLIGHT BULLET CAMERA (AUDIO)



HS-HDSTB-02103A

- 2.4MP HD Plastic Starlight Night Colour Vision Bullet Camera
- 1/2.9" Sony Sensor
- Support-TVI
- Low Illumination, DWDR, 3DNR
- 3MP HD Lens With IR-Cut
- Warmlight Led: 3pcs.
- IR Range: Up To 20m
- Water Resistance: IP 65
- Lens 3.6mm (6mm Optional) Image Resolution:
 - 1080p (1920 × 1080)
- Audio- Inbuilt



4 CH POE SWITCH (10/100)



HSPL-POE-4002P

- 4+2 Uplink Port 10/100mbps Ethernet Ports
- 2×10/100 Uplink Ports(Rj45)
- All 100mbps Ports Support POE
- POE Complies With IEEE 802.3AF/AT, Up To 30w For Single Port
- Up To 250m Transmission Distance On Extend Mode
- Easy To Use, No Need To Configure
- High Quality With All Metal Housing
- Support Lightning Protection 6000v

8 CH POE SWITCH (10/100)



HSPL-POE-8002P

- 8+2 Uplink Port 10/100mbps POE Ethernet Ports
- 2×10/100mbps Uplink Ports(Rj45)
- All 100mbps Ports Support POE
- POE Complies With IEEE 802.3AF/AT, Up To 30w For Single Port
- Up To 250m Transmission Distance On Extend Mode
- Easy To Use, No Need To Configure
- High Quality With All Metal Housing
- Support Lightning Protection 6000v

8CH POE 2-UPLINK GIGA SWITCH (10/100/1000 2 UPLINK)



HSPL-POE-8002GPS

- 8 Port 10/100mbps Ethernet Ports
- 2×10/100/1000mbps Uplink Ports(Rj45)
- All 100mbps Ports Support POE
- POE Complies With IEEE 802.3AF/AT, Up To 30w For Single Port
- Up To 250m Transmission Distance On Extend Mode
- Easy To Use, No Need To Configure
- High Quality With All Metal Housing
- Support Lightning Protection 6000v



8CH POE 2-UPLINK FULL GIGA SWITCH (10/100/1000)



HSPL-POEG-8002FGPS

- 8 Port 10/100mbps Ethernet Ports
- 2×10/100mbps Uplink Ports(Rj45)
- All 100mbps Ports Support POE
- POE Complies With IEEE 802.3AF/AT, Up To 30w For Single Port
- Up To 250m Transmission Distance On Extend Mode
- Easy To Use, No Need To Configure
- High Quality With All Metal Housing
- Support Lighting Protection 6000v

16CH POE 2-UPLINK GIGA SWITCH WITH SFP PORT (10/100/1000 2 UPLINK)



HSPL-POE-16002GPS

- 16 Port 10/100mbps Ethernet Ports
- 2×10/100/1000mbps Uplink Ports(Rj45)
- All 100mbps Ports Support POE
- POE Complies With IEEE 802.3AF/AT, Up To 30w For Single Port
- Up To 250m Transmission Distance On Extend Mode
- Easy To Use, No Need To Configure
- High Quality With All Metal Housing
- Support Lighting Protection 6000v With SFP Port

24CH POE 2-UPLINK GIGA SWITCH WITH SFP PORT (10/100/1000 2 UPLINK)



HSPL-POE-24002GPS

- 24 Port 10/100mbps Ethernet Ports
- 2×10/100/1000mbps Uplink Ports(Rj45)
- All 100mbps Ports Support POE
- POE Complies With IEEE 802.3AF/AT, Up To 30w For Single Port
- Up To 250m Transmission Distance On Extend Mode
- Easy To Use, No Need To Configure
- High Quality With All Metal Housing
- Support Lighting Protection 6000v With SFP Port



5 PORT DESKTOP SWITCH (10/100)



HSPL-DES-502DSN

- Mini size Micro Power-Supply
- 5 Ports (RJ45) 10/100Mbps self-fit

8 PORT DESKTOP SWITCH (10/100)



HSPL-DES-802DSN

- Mini size Micro Power-Supply
- 5 Ports (RJ45) 10/100Mbps self-fit

5 PORT DESKTOP GIGA SWITCH (100/1000)



HSPL-DES-502DSG

- Mini size Micro Power-Supply
- 5 Ports (RJ45) 10/100/1000Mbps self-fit



8 PORT DESKTOP GIGA SWITCH (100/1000)



HSPL-DES-802DSG

- Mini size Micro Power-Supply
- 8 Ports (RJ45) 10/100Mbps self-fit

4CH SMPS POWER SUPPLY - ECO



HS-PS-0412PSECO

- 4CH SMPS POWER SUPPLY - ECO
- Model No.: HS-PS-0412PSECO

8CH SMPS POWER SUPPLY - ECO



HS-PS-0812PSECO

- 8CH SMPS POWER SUPPLY - ECO
- Model No.: HS-PS-0812PSECO



4CH SMPS POWER SUPPLY -PREMIUM



HS-PS-0412PSEPR

- 4CH SMPS POWER SUPPLY - PREMIUM
- Model No.: HS-PS-0412PSEPR


8CH SMPS POWER SUPPLY -PREMIUM



HS-PS-0812PSPR

- 8CH SMPS POWER SUPPLY - PREMIUM
- Model No.: HS-PS-0812PSPR

16CH SMPS POWER SUPPLY -PREMIUM

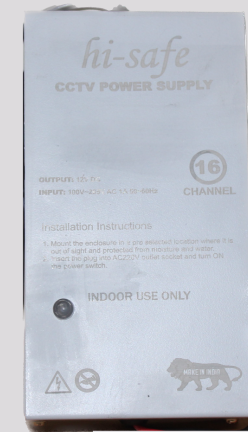

HS-PS-01612PSPR

- 16CH SMPS POWER SUPPLY - PREMIUM
- Model No.: HS-PS-1612PSPR



STANDARD 2U RACK -METAL



HS-RK-2U-RACK-METAL

- STANDARD 2U RACK -METAL
- Model No.: 2U-RACK-METAL

STANDARD 4U RACK -METAL



HS-RK-4U-RACK-METAL

- STANDARD 4U RACK -METAL
- Model No.: 4U-RACK-METAL

STANDARD 6U RACK -METAL



HS-RK-6U-RACK-METAL

- STANDARD 6U RACK -METAL
- Model No.: 6U-RACK-METAL



STANDARD POE JUNCTION BOX (PVC)



HS-RK-POE-BOX-PVC

- STANDARD POE JUNCTION BOX (PVC)
- Model No.: HS-RK-POE-BOX-PVC

65 MTR 3+1 CABLE ALLOY



HS-CBL-31-65-ALLOY

- 65 MTR 3+1 CABLE ALLOY
- Model No.: HS-CBL-31-65-ALLOY

90 YARD 3+1 CABLE COPPER-Gold



HS-CBL-31-90-ECO

- 90 YARD 3+1 CABLE COPPER-Gold
- Model No.: HS-CBL-31-90-ECO



Cables



90 YARD 3+1 CABLE COPPER PREMIUM



HS-CBL-31-90-PREMIUM

- 90 YARD 3+1 CABLE COPPER-Premium
- Model No.: HS-CBL-31-90-PREMIUM

200 MTR CAT6 E CABLE PREMIUM CCA CABLES



HS-CBL-6E-200-CCA

- 200 MTR CAT6 E CABLE PREMIUM CCA CABLES
- Model No.: HS-CBL-6E-200-CCA

200 MTR CAT6 E CABLE PREMIUM COPPER CABLES



HS-CBL-6E-200-COPPER

- 200 MTR CAT6 E CABLE PREMIUM COPPER CABLES
- Model No.: HS-CBL-6E-200-COPPER



Cables



100 MTR CAT6 E CABLE PREMIUM CCA CABLES



HS-CBL-6E-100-CCA

- 100 MTR CAT6 E CABLE PREMIUM CCA CABLES
- Model No.: HS-CBL-6E-100-CCA

100 MTR CAT6 E CABLE PREMIUM COPPER CABLES



HS-CBL-6E-100-COPPER

- 100 MTR CAT6 E CABLE PREMIUM COPPER CABLES
- Model No.: HS-CBL-6E-100-COPPER

305 MTR OUTDOOR CAT6 CABLE CCA CABLES



HS-CBL-6E-305-CCA

- 305 MTR OUTDOOR CAT6 CABLE CCA CABLES
- Model No.: HS-CBL-6E-305-CCA



305 MTR OUTDOOR CAT6 CABLE COPPER CABLES



HS-CBL-6E-305-COPPER

- 305 MTR OUTDOOR CAT6 CABLE
COPPER CABLES
- Model No.: HS-CBL-6E-305-COPPER

3+1 OUTDOOR CABLE



HS-CBL-3+1-OUTDOOR

- 3+1 OUTDOOR CABLE
- Model No.: HS-CBL-3+1-OUTDOOR



RESIDENTIAL SOLUTION

Get our CCTV system installed at your home and prevent any undesired burglars attempting to enter your property without your consent.



CORPORATE SOLUTION

With our fully featured CCTV installation services, we strive to eliminate the workforce violence in order to create a safe working environment.



BANKING & FINANCE

It is a high time to enable a reliable surveillance system in banking and financial institutions in order to prevent them against vulnerabilities.



EDUCATION

The demand of campus security is increasing enormously in order to establish a safe and sound learning environment.



HOSPITALITY / HEALTHCARE

Security and safety at healthcare facilities are important for both quality healthcare and public safety.



RETAIL SECTOR

Retail shrinkage continues to be most vital threat to this retail industry
The only efficient way to keep this in check is through surveillance.




REAL ESTATE

We offer round the clock surveillance for a wide array of the security needs of the real estate sector.



TRANSPORT & TRAFFIC

An effective surveillance plays a vital role to enhance the quality of transportation recognizing suspicious items or activities.

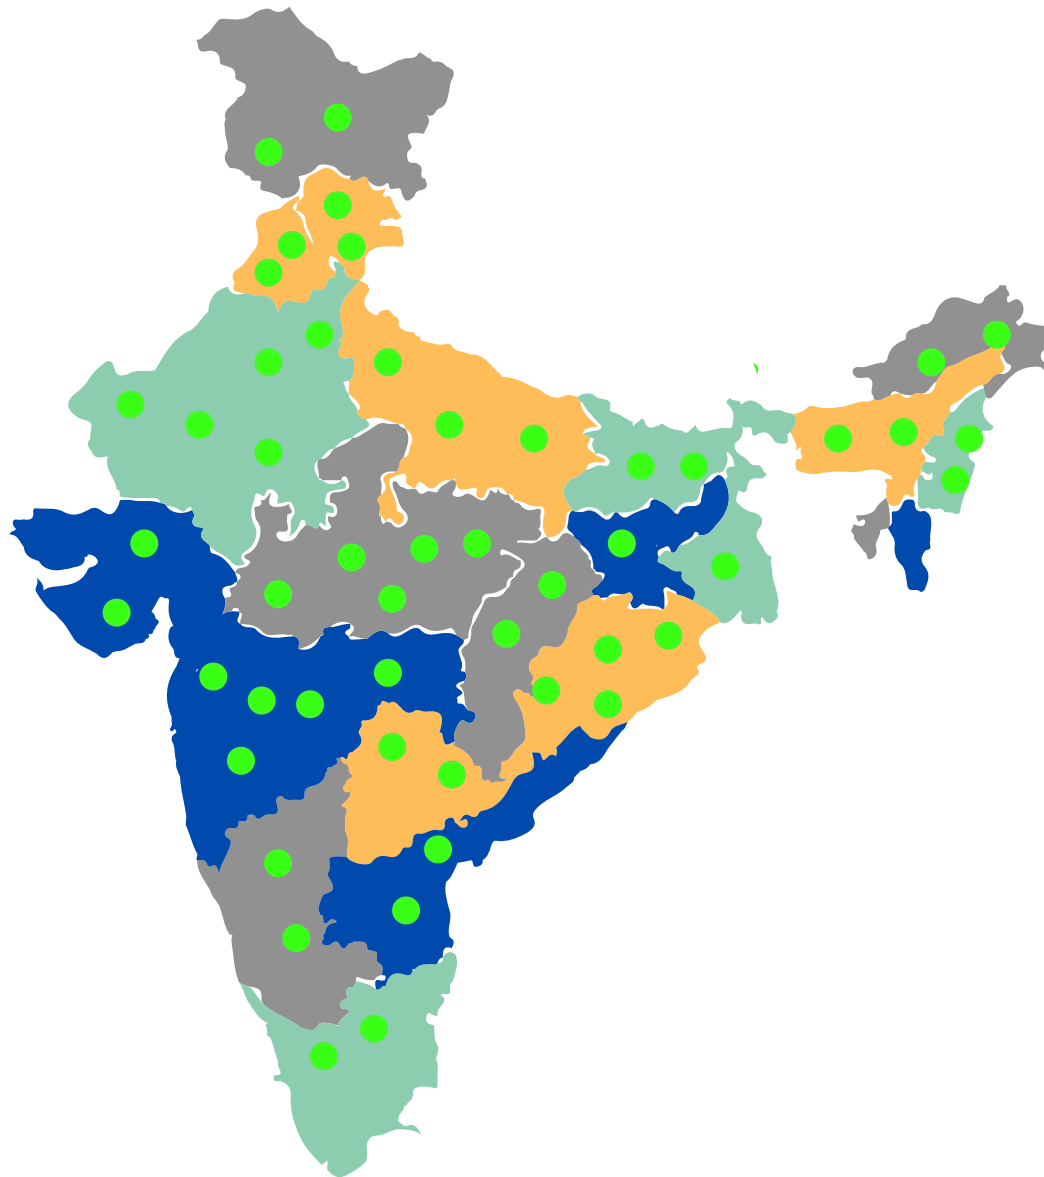

Distribution Partners

The Hi-Safe partnership program, is strategic Partner Program with a 3-tier Membership which creates the foundation for a stronger engagement between Hi-Safe and our Channel Partners. It fundamentally ensures that partners who align to the objectives of this program are assured of their continued growth with Hi-Safe.



Thank You

Contact us to know more

